PCI-SIG®
Architecture Overview

Richard Solomon

PCI-SIG WG Member

Synopsys

What's All This PCI Stuff Anyway?

- **Presentation will cover basic concepts and their evolution from PCI™ through PCI-X™ to PCI Express®**
  - Specs written assuming designers have these key background concepts
  - High level overview of PCI, PCI-X, and PCI Express

PCI Background

Revolutionary AND Evolutionary

- **PCI**
  - Revolutionary
    - Plug and Play jumperless configuration (BARs)
    - Unprecedented bandwidth
      - 32-bit / 33MHz – 133MB/sec
      - 64-bit / 66MHz – 533MB/sec
    - Designed from day 1 for bus-mastering adapters
  - Evolutionary
    - System BIOS maps devices then operating systems boot and run without further knowledge of PCI
    - PCI-aware O/S could gain improved functionality

Revolutionary AND Evolutionary

- **PCI-X**
  - Revolutionary
    - Unprecedented bandwidth
      - Up to 1066MB/sec with 64-bit / 133MHz
    - Registered bus protocol
      - Eased electrical timing requirements
    - Brought split transactions into PCI “world”
  - Evolutionary
    - PCI compatible at hardware *AND* software levels
    - PCI-X 266/533 added as “mid-life” performance bump
      - 2133MB/sec at PCI-X 266 and 4266MB/sec at PCI-X 533

Revolutionary AND Evolutionary

- **PCI Express (aka PCIe®)**
  - Revolutionary
    - Unprecedented bandwidth
      - x1: 250,500,1000MB/sec in *EACH* direction
      - x16: 4000,8000,16000MB/sec in *EACH* direction
    - “Relaxed” electricals due to serial bus architecture
      - Point-to-point, low voltage, dual simplex with embedded clocking
  - Evolutionary
    - PCI compatible at software level
      - Configuration space, Power Management, etc
      - Of course, PCIe-aware O/S can get more functionality
    - Transaction layer familiar to PCI/PCI-X designers
    - System topology matches PCI/PCI-X
    - PCIe 2.0 doubled bandwidth from 250MB/s/lane to 500MB/s/lane, PCIe 3.0 to 1GB/s/lane… PCIe 4.0 will double again to 2GB/s/lane!

PCI Concepts

PCI Concepts

- **Address spaces**
  - Memory – 64-bit
  - I/O – 32-bit (non-burstable since PCI-X)
  - Configuration (“Config”) – Bus/Device/Function

- **Key configuration space regs/concepts**
  - *B*ase *A*ddress *R*egisters (BARs)
    - 64-bit vs 32-bit addressing
  - Linked list of capabilities

Address Spaces – Memory & I/O

- **Memory space mapped cleanly to CPU semantics**
  - 32-bits of address space initially
  - 64-bits introduced via Dual-Address Cycles (DAC)
    - Extra clock of address time on PCI/PCI-X
    - 4DWORD header in PCI Express
  - Burstable
- **I/O space mapped cleanly to CPU semantics**
  - 32-bits of address space
    - Actually much larger than CPUs of the time
  - Non-burstable
    - Most PCI implementations didn't support
    - PCI-X codified
    - Carries forward to PCI Express

Address Spaces – Configuration

- **Configuration space???**
  - Allows control of devices' address decodes without conflict
  - No conceptual mapping to CPU address space
    - Memory-based access mechanisms introduced with PCI-X and PCIe
  - Bus / Device / Function (aka BDF) form hierarchy-based address
    - "Functions" allow multiple, logically independent agents in one physical device
      - E.g. combination SCSI + Ethernet device
      - 256 bytes or 4K bytes of configuration space per device
    - PCI/PCI-X bridges form hierarchy
    - PCIe switches form hierarchy
      - Look like PCI-PCI bridges to software
  - "Type 0" and "Type 1" configuration cycles
    - Type 0: to same bus segment
    - Type 1: to another bus segment

Configuration Space (cont'd)

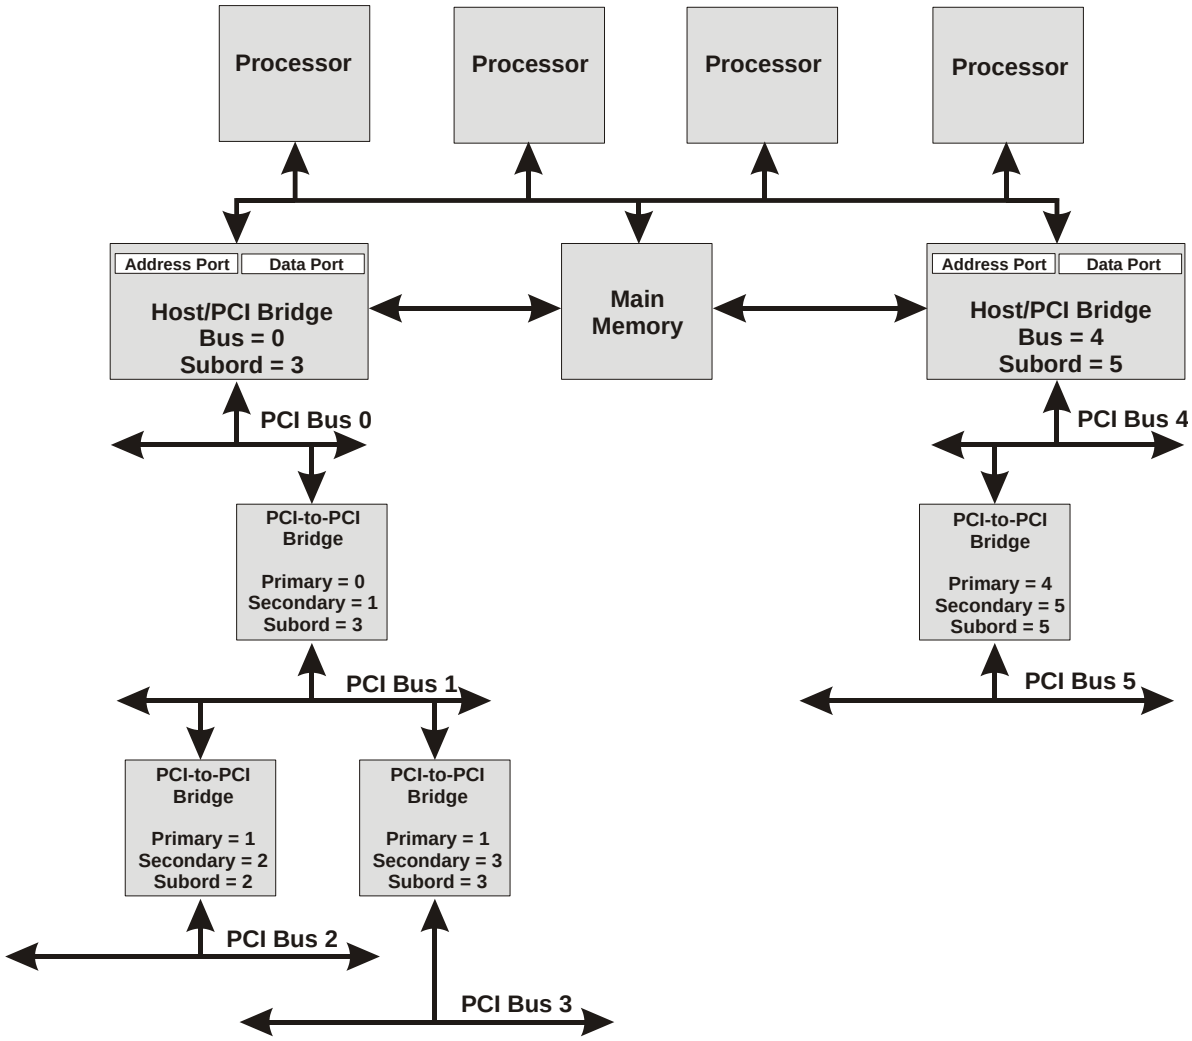

Using Configuration Space

- **Device Identification**
  - VendorID: PCI-SIG assigned
  - DeviceID: Vendor self-assigned
  - Subsystem VendorID: PCI-SIG
  - Subsystem DeviceID: Vendor
- **Address Decode controls**
  - Software reads/writes BARs to determine required size and maps appropriately
  - Memory, I/O, and bus-master enables
- **Other bus-oriented controls**

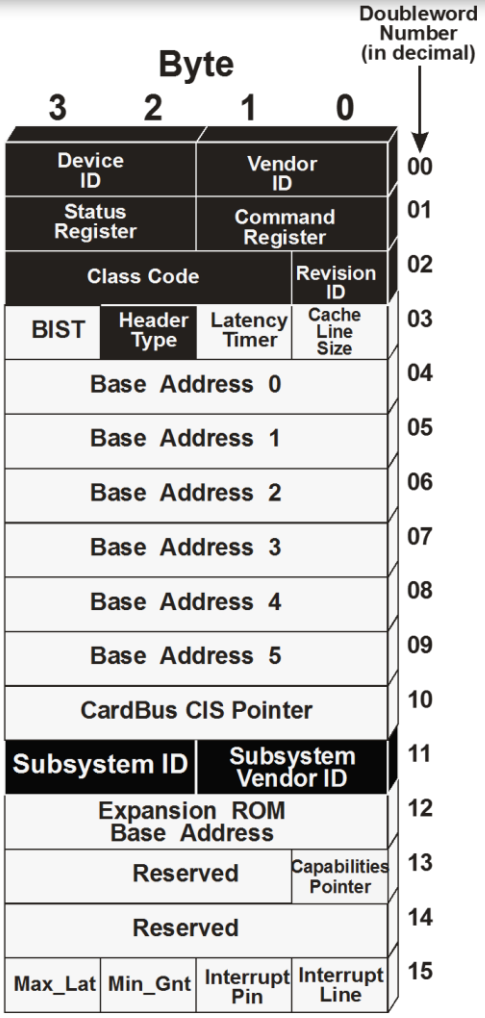

Using Configuration Space – Capabilities List

- **Linked list**
  - Follow the list! Cannot assume fixed location of any given feature in any given device
  - Features defined in their related specs:
    - PCI-X, PCIe, PCI Power Management, Etc…
    - Find consolidated list in ***PCI Code and ID Assignment Spec***

Using Configuration Space – Extended Capabilities List

- **Linked list – new with PCI Express**
  - Follow the list! Cannot assume fixed location of any given feature in any given device
  - First entry in list is *always* at 100h
  - Features defined in PCI Express and related (e.g. MR-IOV, SR-IOV) specifications
  - Consolidated in ***PCI Code and ID Assignment Spec***

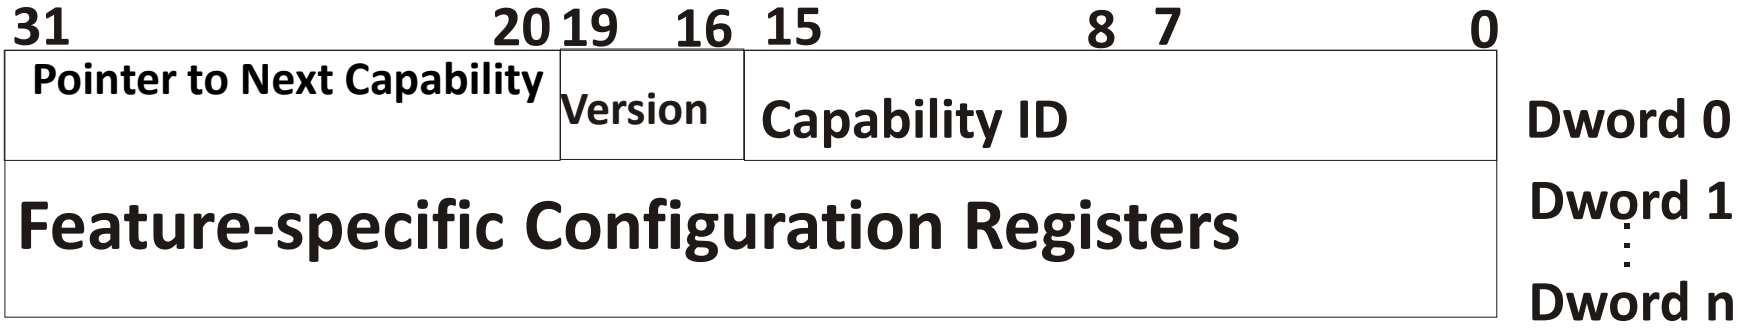

Interrupts

- **PCI introduced INTA#, INTB#, INTC#, INTD# - collectively referred to as INTx**
  - Level sensitive
  - Decoupled device from CPU interrupt
  - System controlled INTx to CPU interrupt mapping
  - Configuration registers
    - report A/B/C/D
    - programmed with CPU interrupt number
- **PCI Express mimics this via “virtual wire” messages**
  - Assert_INTx and Deassert_INTx

What are MSI and MSI-X?

- **Memory Write replaces previous interrupt semantics**
  - PCI and PCI-X devices stop asserting INTA/B/C/D and PCI Express devices stop sending Assert_INTx messages once MSI or MSI-X mode is enabled
  - MSI uses one address with a variable data value indicating which “vector” is asserting
  - MSI-X uses a table of independent address and data pairs for each “vector”
- **NOTE: *Boot devices* and any device intended for a non-MSI operating system generally must still support the appropriate INTx signaling!**

PCI-X Explained

What is PCI-X?

- **“PCI-X is high-performance backward compatible PCI”**
  - PCI-X uses the same PCI architecture
  - PCI-X leverages the same base protocols as PCI
  - PCI-X leverages the same BIOS as PCI
  - PCI-X uses the same connector as PCI
  - PCI-X and PCI products are interoperable
  - PCI-X uses same software driver models as PCI
- **PCI-X is faster PCI**
  - PCI-X 533 is up to 32 times faster than the original version of PCI
  - PCI-X protocol is more efficient than conventional PCI

PCI-X Modes and Speeds

Mode	$V_{I/O}$	64-Bit Slots*	64-Bit MB/s	32-Bit Slots*	32-Bit MB/s	16-Bit	Error Prot	Conf Bytes	DIM
PCI 33	5V/3.3V		266		133	N/A	par	256	N/A
PCI 66	3.3V		533		266	N/A	par	256	N/A
PCI-X 66	3.3V		533		266	N/A	par or ECC	256	yes
PCI-X 133 (operating at 100 MHz)	3.3V		800		400	N/A	par or ECC	256	yes
PCI-X 133	3.3V		1066		533	N/A	par or ECC	256	yes
PCI-X 266	1.5V		2133		1066	533	ECC	4K	yes
PCI-X 533	1.5V		4266		2133	1066	ECC	4K	yes

Mode 1

Mode 2

* For lower bus speeds, # slots / bus is implementation choice to share bandwidth

PCI 2.x/3.0 vs. PCI-X Mode 1

- **Same bus and control signals**
- **Evolutionary protocol changes**
- **Clock frequency up to 133 MHz**

New "Attribute" phase for enhanced features

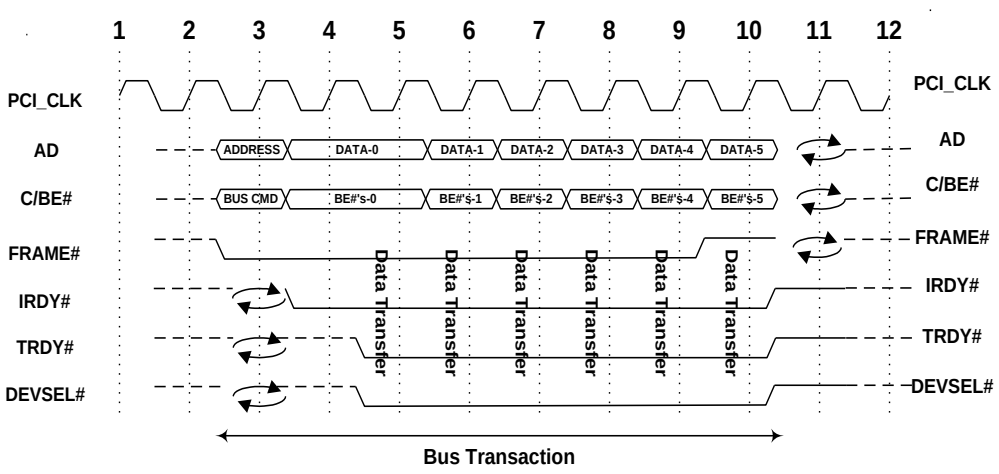

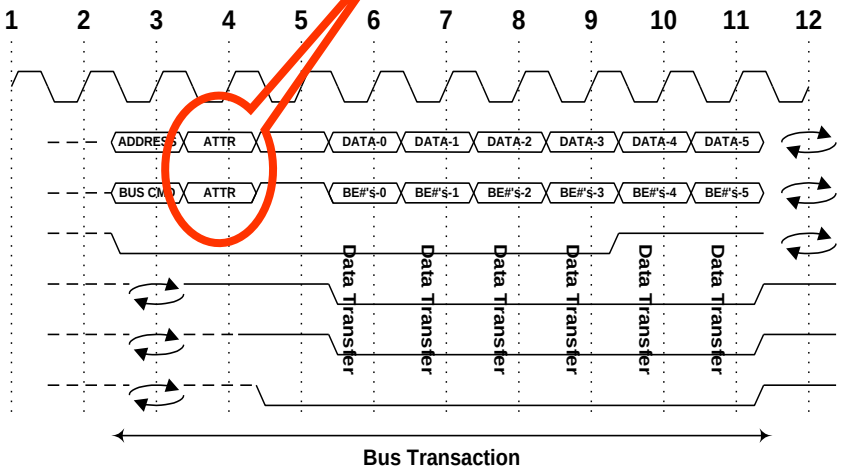

(Common clock)

Transaction Attributes

Requester Attributes for Burst Transactions

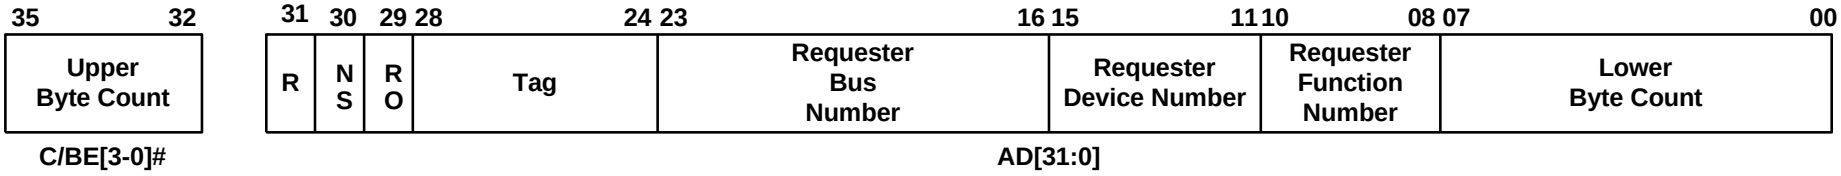

Requester Attributes for DWORD Transactions

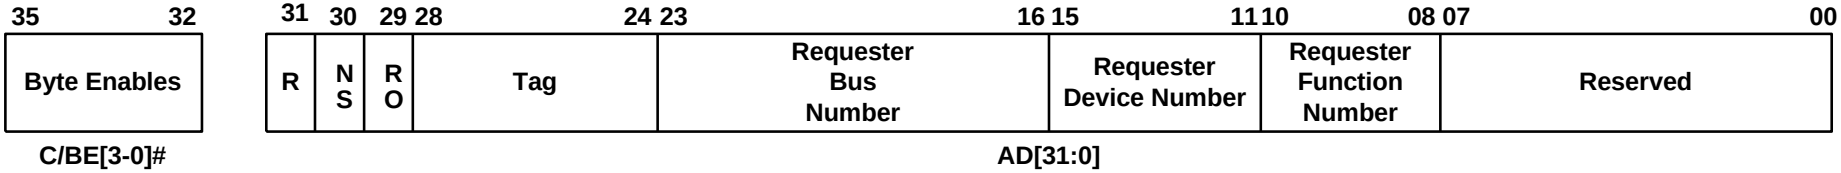

RO -- Relax ordering

NS -- No Snoop

R -- Reserved

Split Transactions

- **Bus efficiency of Read almost as good as Write**
- **Split Completion routed back to requester across bridges using initiator's number and bus number**
- **Split Transaction components**
  - Step 1. Requester requests bus and arbiter grants bus
  - Step 2. Requester initiates transaction
  - Step 3. Target (completer) communicates intent with new target termination, Split Response
  - Step 4. Completer executes transaction internally
  - Step 5. Completer requests bus and arbiter grants bus
  - Step 6. Completer initiates Split Completion

Efficient PCI-X Protocol

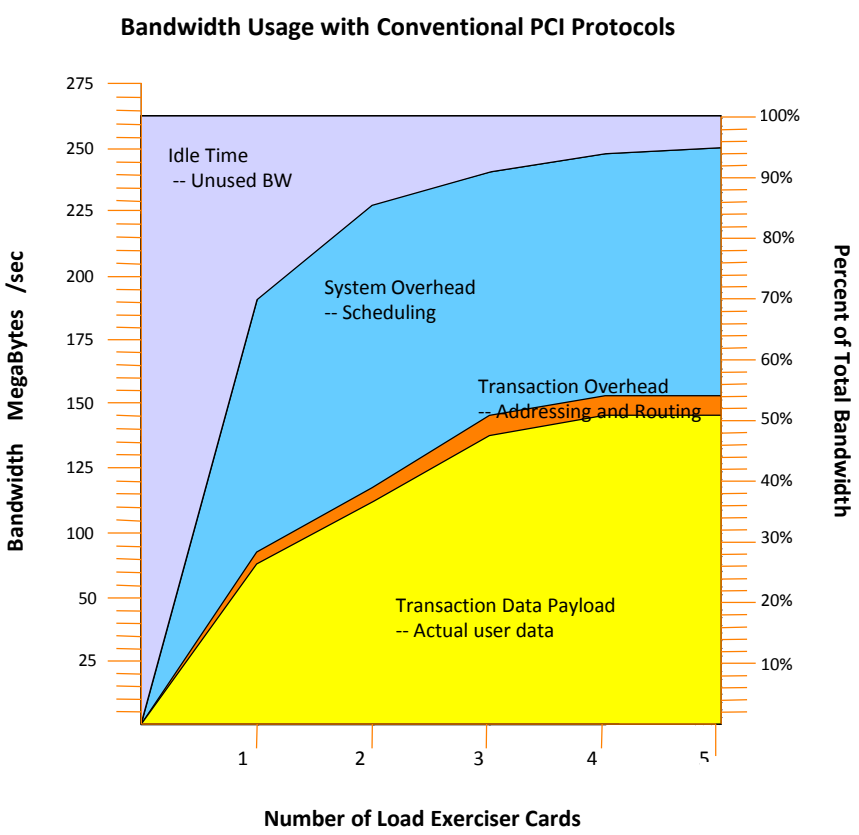

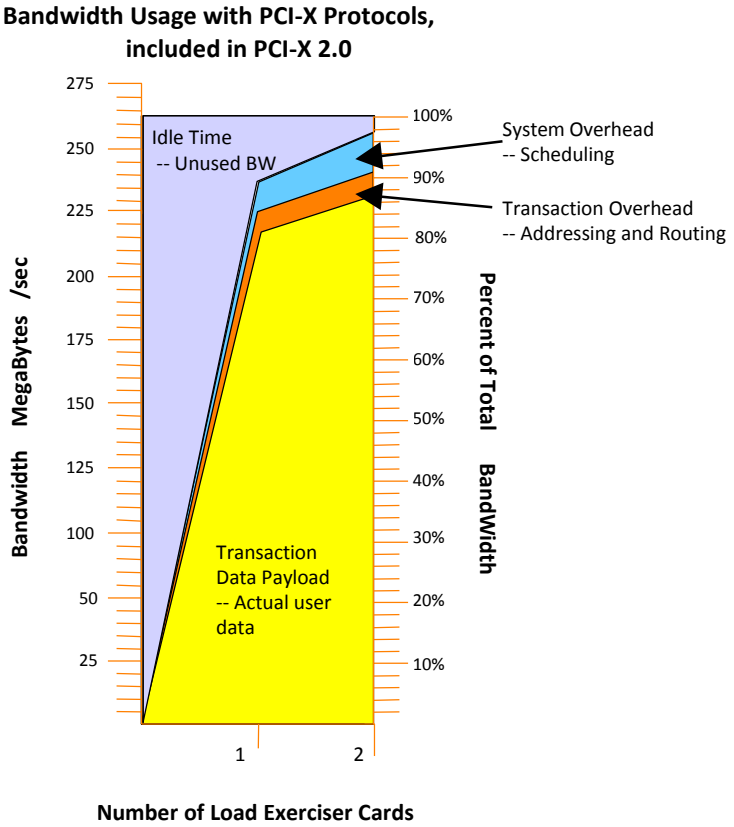

The PCI-X protocol is more efficient than traditional PCI.

PCI Express Overview

PCIe Specifications

Form Factors:

- **Card (CEM)**
- **Mini Card (MiniCEM)**
- **M.2**
- **ExpressModule**
- **Cable**
- **OCuLink**

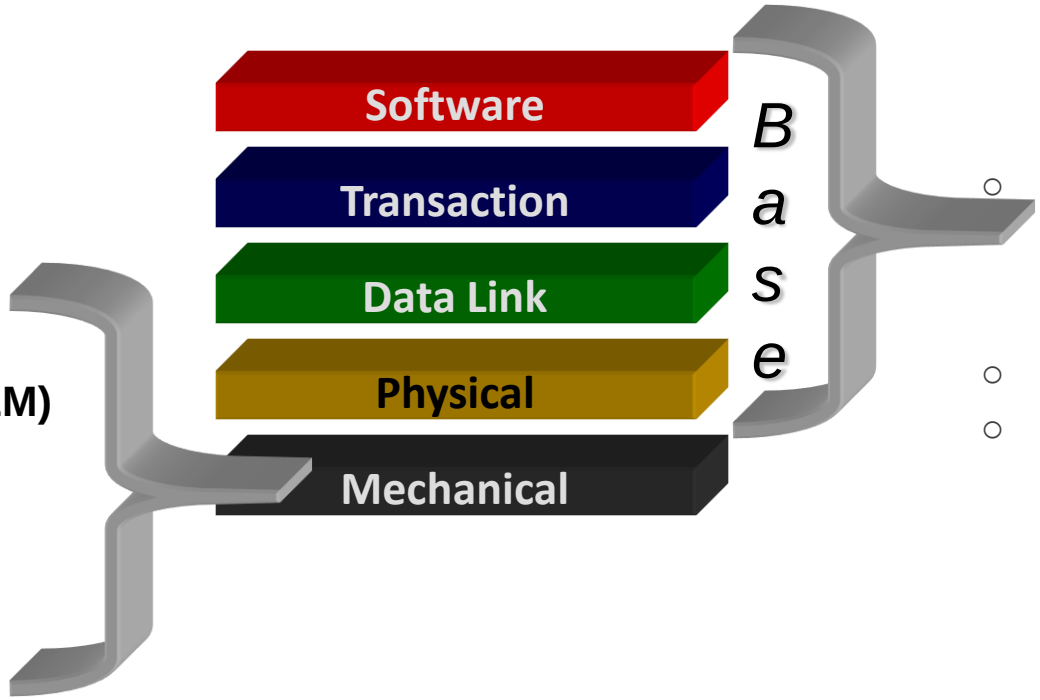

- **Base**
  - Electrical
  - Protocol
  - Configuration
- **Bridge**
- **I/O Virtualization**
  - Single Root
  - Multi-Root
  - Address Translation Services

PCIe Architecture Features

- **PCI Compatibility**
  - Configuration and PCI software driver model
  - PCI power management software compatible
- **Performance**
  - Scalable frequency (2.5-16GT/s)
  - Scalable width (x1, x4, x8, x16)
  - Low latency and highest utilization (Bandwidth/pin)
- **Physical Interface**
  - Point-to-point, dual-simplex
  - Differential low voltage signaling
  - Embedded clocking
  - Supports connectors, modules, cables
- **Protocol**
  - Fully packetized split-transaction
  - Credit-based flow control
  - Hierarchical topology support
  - Virtual channel mechanism
- **Advanced Capabilities**
  - CRC-based data integrity, hot plug, error logging
- **Enhanced Configuration Space**
  - Extensions and bridges into other architectures

PCIe Speed Evolution

- **Introduced at 2.5GT/sec**
  - Commonly called 2.5GHz
    - PCI-SIG eventually adopts GigaTransfers per Second (GT/s) terminology
  - 100 MHz reference clock provided
    - Eases synchronization between ends
      - Particularly when Spread Spectrum Clocking in used
    - Optional, but nearly universal in traditional “PC” world
  - 8b/10b encoding used to provide DC balance and reduce “runs” of 0s or 1s which make clock recovery difficult
- **Specification Revisions: 1.0, 1.0a, 1.1**

PCIe Speed Evolution (cont'd)

- **Speed doubled to 5GT/sec**
  - Reference clock remains at 100 MHz
    - Lower jitter clock sources required vs 2.5GT/sec
    - Generally higher quality clock generation/distribution required
  - 8b/10b encoding continues to be used
- **Specification Revisions: 2.0, 2.1**
  - Devices choosing to implement a maximum rate of 2.5GT/sec can still be fully 2.x compliant!

PCIe Speed Evolution (cont'd)

2 x 5 = ?

PCIe Speed Evolution (cont'd)

2 x 5 = 8 ???

- **Speed "doubled" over PCIe 2.x 5GT/sec**
- **8GT/sec electrical rate**
  - 10GT/sec required significant cost and complexity in channel, receiver design, etc.
- **Reference clock remains at 100 MHz**
  - Very similar requirements to 5GT/sec mode
- **Specification Revisions: 3.0**
  - Devices choosing to implement a maximum rate of 2.5GT/sec or 5GT/sec can still be fully 3.0 compliant!

PCIe Speed Evolution (cont'd)

- **128/130 encoding reduces overhead from the 20% loss of 8b/10b**
  - Original plan was scrambling-only for exactly 2x the 5GT/sec bandwidth
    - 5000Mb/sec / (10bits/byte) = 500MB/sec per lane
    - 8000Mb/sec / (8bits/byte) = 1000MB/sec per lane
  - Pure 128/130 encoding is ~1.5% loss

- **Scrambling replaces DC-offset and run-length reduction functions of 8b/10b**

PCI Express Protocol

PCIe Protocol Overview

- **PCI-X Address/Attribute phases:**

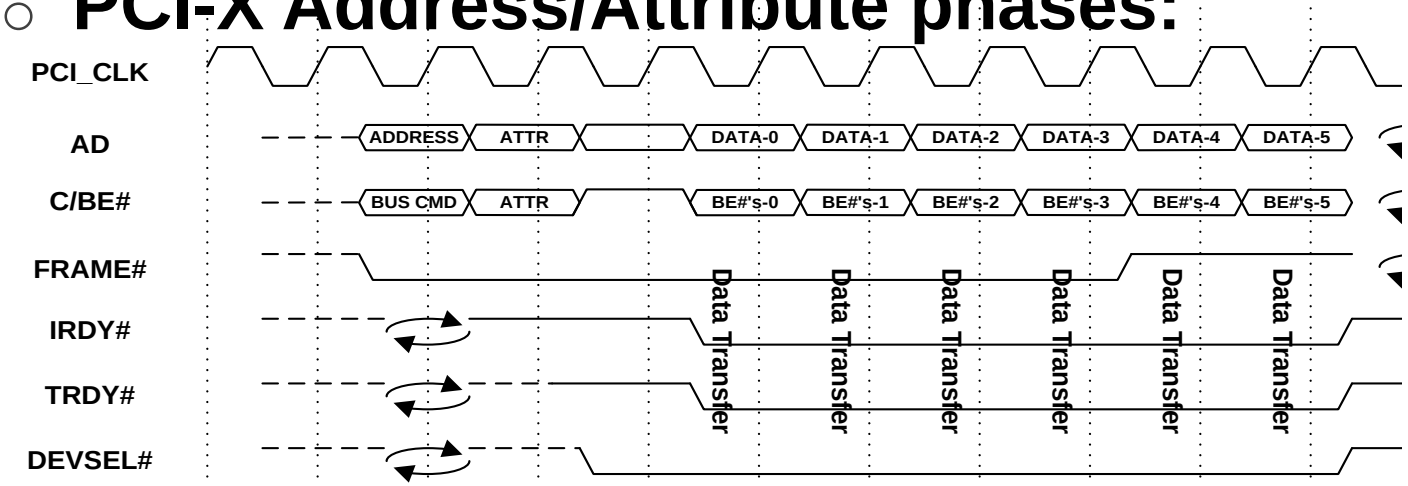

- **Evolved into the PCIe Packet Header:**

	7	6	5	4	3	2	1	0	7	6	5	4	3	2	1	0	7	6	5	4	3	2	1	0	7	6	5	4	3	2	1	0
Byte 0 >	R	Fmt x 1			Type				R	TC			Reserved				TD	EP	Attr		R				Length							
Byte 4 >	Requester ID																Tag								Last DW BE				1st DW BE			
Byte 8 >	Address[63:32]																															
Byte 12 >	Address[31:2]																								R							

PCIe Protocol Overview

- **The packet bytes get converted to 8b/10b (or 128/130 at 8GT/sec) and serialized**

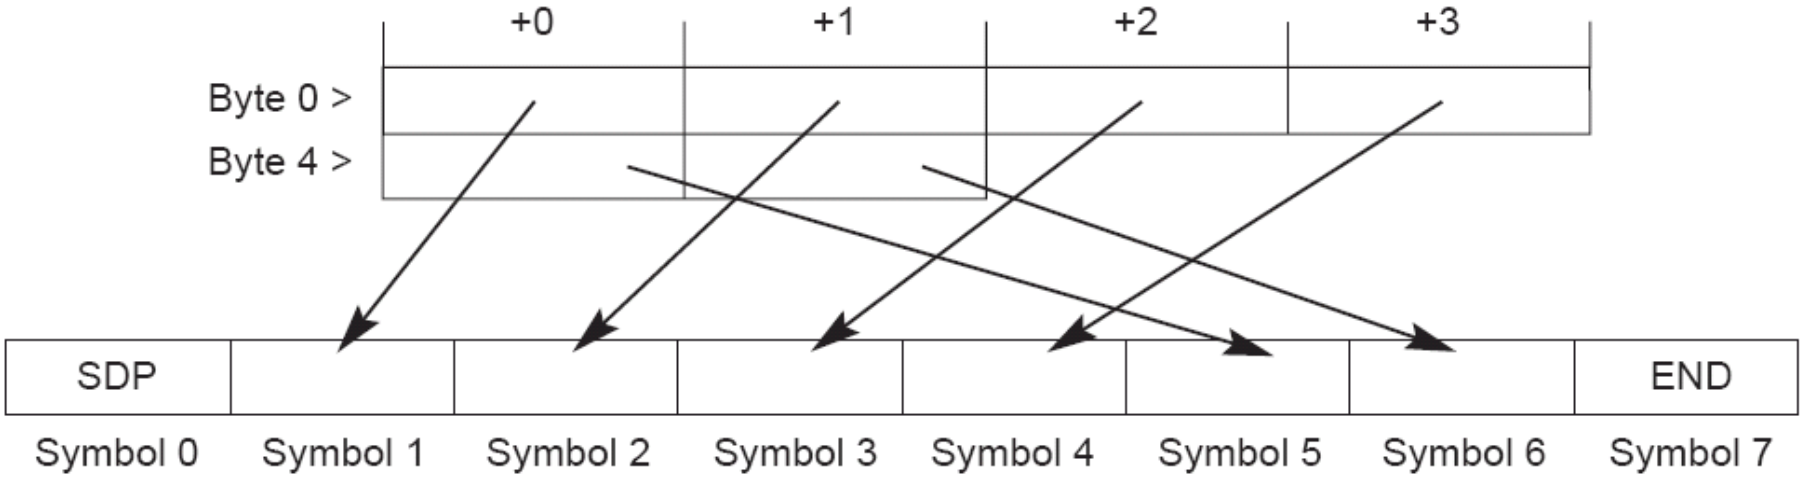

  - Example above is in 2.5GT/s or 5GT/s mode – symbols are different in 8GT/s mode

PCIe Protocol Overview

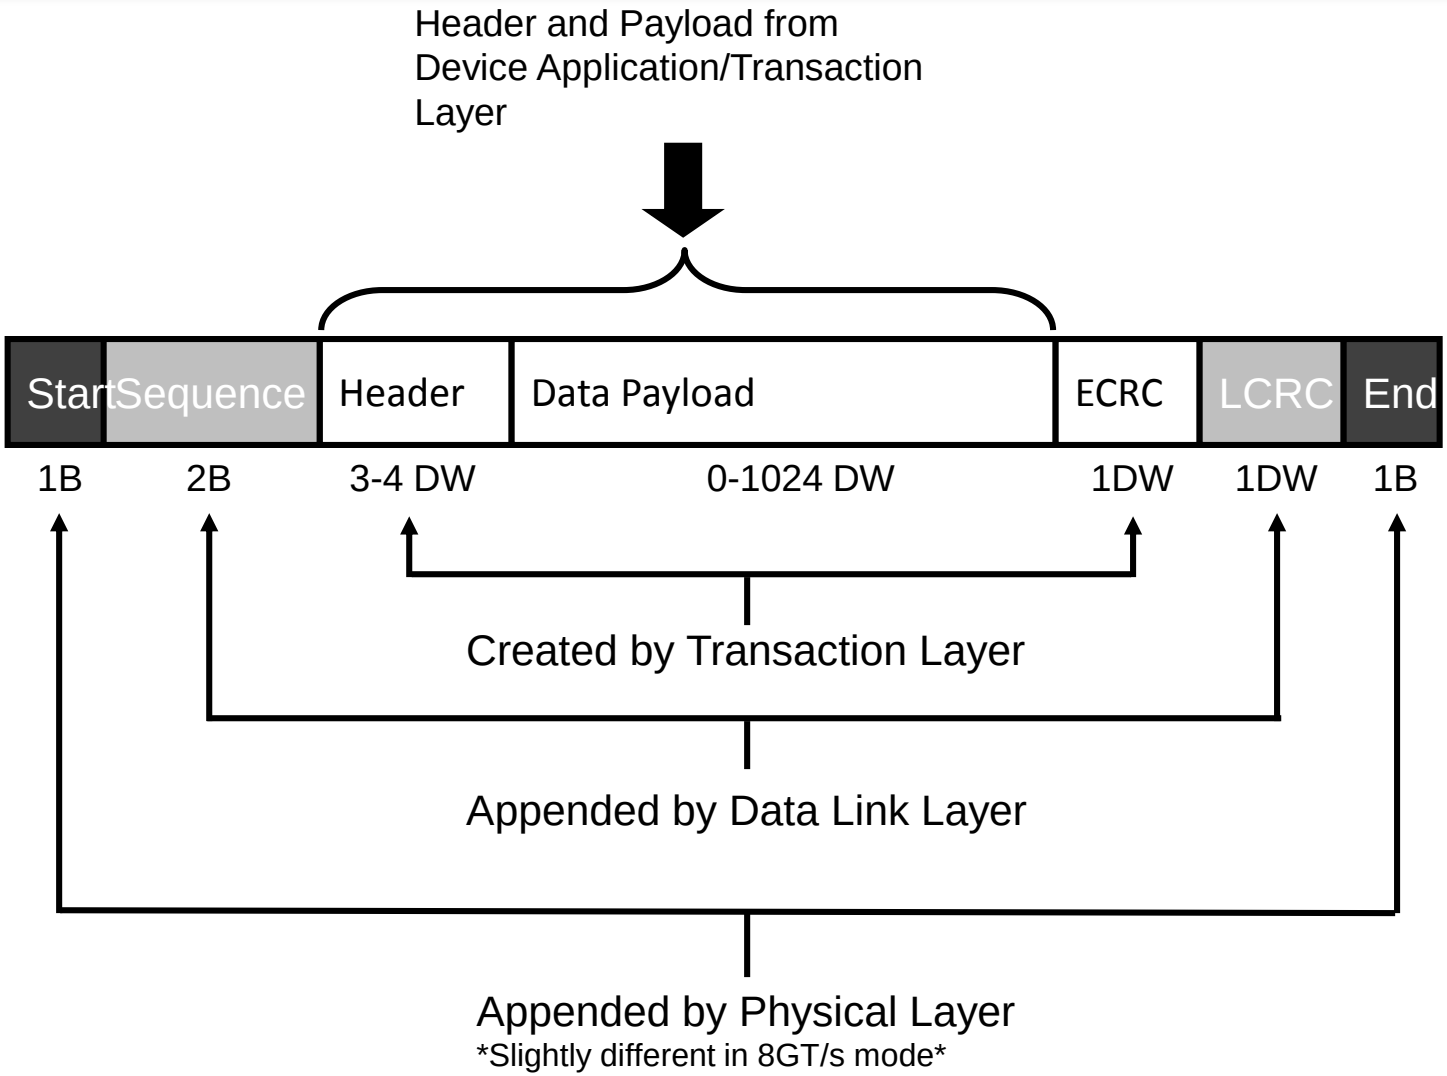

PCIe Protocol Overview

- **Framing varies depending on link width**
  - x1

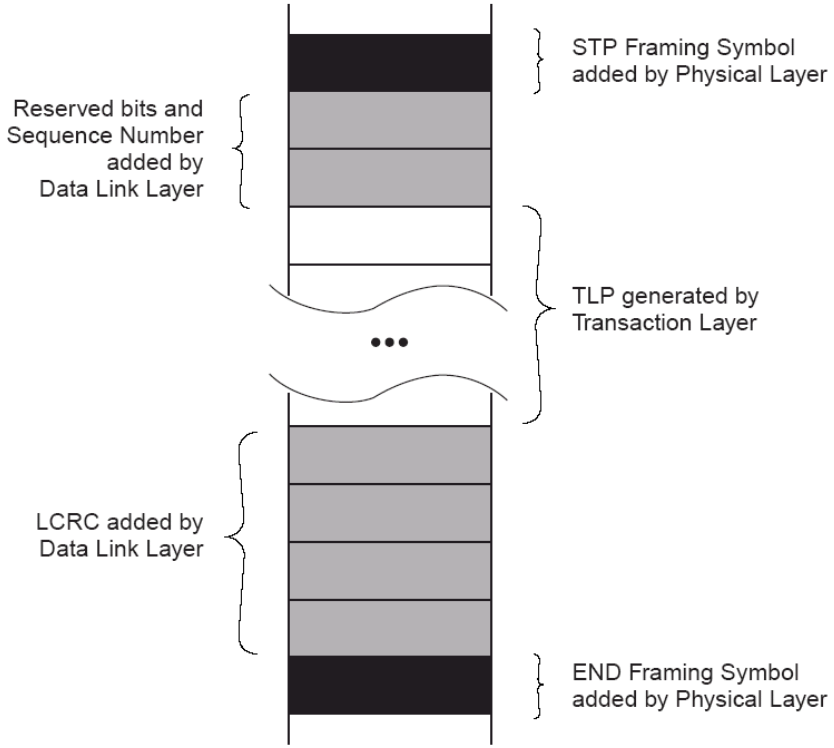

  - Example above is in 2.5GT/s or 5GT/s mode – symbols are different in 8GT/s mode

PCIe Protocol Overview

- **Framing varies depending on link width**
  - x4

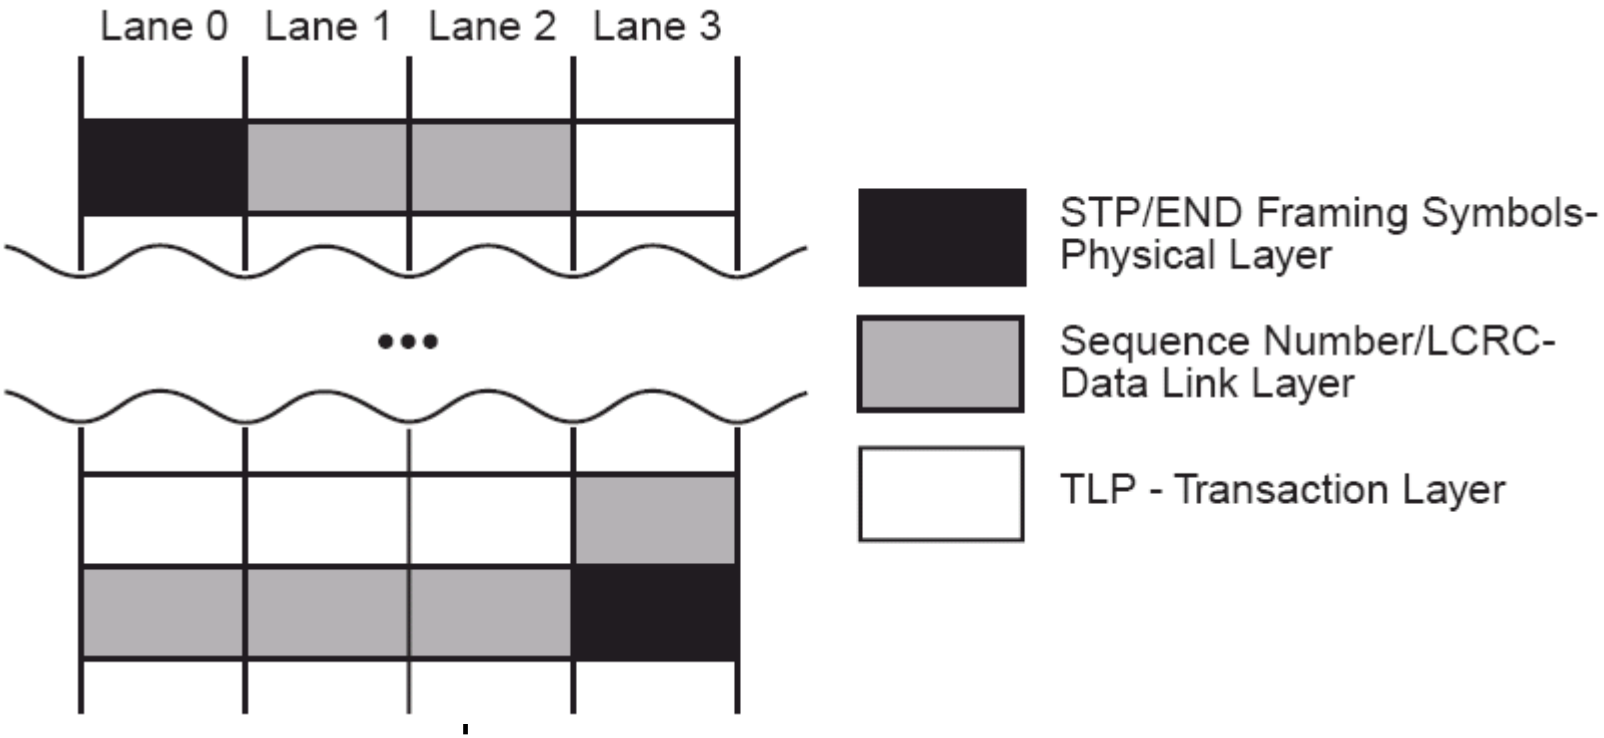

symbols are different in 8GT/s mode

Thank you for attending the PCI-SIG Developers Conference 2017.

For more information, please go to www.pcisig.com

Don't forget to submit your feedback via the mobile app!

Download the app by searching stores for **PCI-SIG Developers Conference** or entering the following URL into your mobile browser: **https://crowd.cc/s/EOtK**

Enter event code: **DevCon17**

Alternatively, access here: https://event.crowdcompass.com/devcon-17

Note: Create an account within the app so Admin knows who to contact if selected as the prize winner.

You will earn 1 raffle entry for each session you provide feedback on (up to 11 sessions).
General survey feedback = 1 raffle entry.